


# 銅線用裸圧着端子 丸形端子 (R形)

JIS JQ0608003

UL E74917

SP 66230

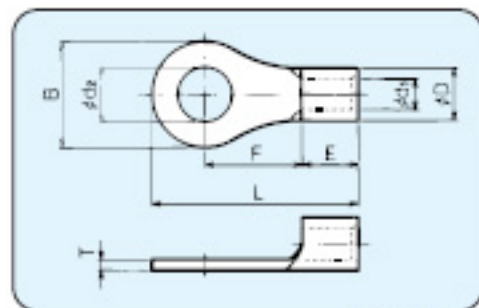

RoHS指令対応品

規格	印	呼び	各部の寸法								適合電線範囲			適合工具	一箱入数
			φd <sub>1</sub>	B	L	F	E	φD	φd <sub>2</sub>	T	単線mm	撚線mm	AWG		
		● R0.08-3	3.3	5.2	12.5	5.9	4.0	2.3	0.45	0.8	-	0.08	28	DS031 DH-1B	1,000 (100×10)
		● R0.08-M3.5	3.7	5.5	14.5	7.7									
		● R0.3-2	2.2	5.2	12.5	5.9	4.0	2.3	0.8	0.65	0.32 }	0.1 }	26-24	*DS031 *DH-1B *DS-A5	1,000 (100×10)
		● R0.3-3	3.2												
		● R0.3-3.5	3.7	6.6	15.0	7.7	4.0	2.3	0.8	0.65	}	}	26-24	*DS031 *DH-1B *DS-A5	1,000 (100×10)
		● R0.3-4	4.3												
		● R0.5-2	2.2	5.2	12.5	5.9	4.0	2.3	1.2	0.5	0.5 }	0.2 }	24-20	*DS031 *DH-1B *DS-A5	1,000 (100×10)
		● R0.5-3	3.2												
		● R0.5-3.5	3.7	6.6	15.0	7.7	4.0	2.3	1.2	0.5	}	}	24-20	*DS031 *DH-1B *DS-A5	1,000 (100×10)
		● R0.5-4	4.3												
		● R0.5-5	5.3	8.0		7.0	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R1.25-2	2.5	5.5	12.0	4.8									
		● R1.25-3	3.2				13.8	6.6							
		● R1.25-M3	3.2	6.6	14.4	6.6	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R1.25-V3	3.2	8.0	15.5	7.5									
		● R1.25-L3	3.2	8.0	15.5	7.5	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R1.25-S3.5	3.7	5.5	12.0	4.8									
		● R1.25-M3.5	3.7	6.6	14.4	6.6	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R1.25-3.5	3.7	6.6	14.4	6.6									
		● R1.25-S4	4.3	8.0	15.5	7.5	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R1.25-4	4.3	8.0	15.5	7.5									
		● R1.25-5	5.3	8.0	15.5	7.5	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R1.25-L5	5.3	18.5	10.0										
		● R1.25-6	6.4	11.5	20.2	10.0	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R1.25-8	8.4	13.6	21.8	10.5									
		● R1.25-10	10.5	13.6	21.8	10.5	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R1.25-A10	10.5	22.0	29.5	14.0									
		● R1.25-12	13.0	22.0	29.5	14.0	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R2-3	3.2	6.6	13.0	5.2									
		● R2-M3	3.2	5.5	12.4	6.5	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R2-L3	3.2	5.5	13.7	6.5									
		● R2-M3.5	3.7	5.8	13.9	6.5	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R2-3.5	3.7	6.6	13.0	5.2									
		● R2-L3.5	3.7	6.6	16.0	8.3	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R2-M4	4.3	6.6	14.3	6.5									
		● R2-S4	4.3	6.6	16.0	8.3	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R2-4	4.3	8.5	16.5	7.8									
		● R2-S5	5.3	8.5	16.5	7.8	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R2-5	5.3	9.5	17.0	11.0									
		● R2-L5	6.4	12.0	21.5	11.0	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R2-6	6.4	18.0	27.5	14.0									
		● R2-8	8.4	16.0	28.5	16.0	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R2-A8	8.4	14.5	24.0	12.3									
		● R2-B8	8.4	14.5	24.0	12.3	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R2-10	10.5	18.0	27.5	14.0									
		● R2-A10	10.5	20.0	32.5	18.0	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R2-B10	10.5	17.0	26.9	13.9									
		● R2-12	13.0	22.0	29.5	14.0	4.5	3.4	1.7	0.8	}	}	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34	1,000 (100×10)
		● R2-A12	13.0	7.0	17.1	8.3									
		● R3.5-S4	4.3	8.5	17.8	8.3	5.3	5.0	3.0	1.0	1.82 }	2.63 }	12	*DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14	1,000 (100×10)
		● R3.5-4	4.3	8.5	17.8	8.3									
		● R3.5-5	5.3	12.0	21.8	10.5	5.3	5.0	3.0	1.0	}	}	12	*DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14	1,000 (100×10)
		● R3.5-6	6.4	14.5	25.0	12.5									
		● R3.5-8	8.4	14.5	25.0	12.5	5.3	5.0	3.0	1.0	}	}	12	*DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14	1,000 (100×10)
		● R3.5-10	10.5	22.0	29.5	14.0									
		● R3.5-12	13.0	20.0	31.0	15.7	5.3	5.0	3.0	1.0	}	}	12	*DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14	1,000 (100×10)
		● R3.5-12	13.0	20.0	31.0	15.7									

1. 各呼びの印は、JIS規格品、UL登録品、CSA登録品です。
2. CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
3. 上記寸法表にかかわらず特注品もご相談ください。
4. \*印はUL適合品です。
5. ●印は曲げ加工可能品です。ただし、一部の製品については角度の制限がありますので、ご相談ください。